

永祥[®]
YONGXIANG

MGCZ 60X16J 重力谷糙分离机
60X12J

PADDY SEPARATOR

运转中完全平衡的
单体重力谷糙分离机
Completely balanced paddy
separator during operation



湖北永祥粮食机械股份有限公司

HUBEI YONGXIANG FOOD PROCESSING MACHINE CO.,LTD.

MGCZ60X16J/60X12J重力谷糙分离机 (专利号: 200820066453.4)

MGCZ60×16J/60×12J重力谷糙分离机是永祥集多年研发生产谷糙分离机的专业经验,结合国内外稻米原料的实际,适应现代碾米企业生产工艺需要,创新设计的新型谷糙分离设备,具备较高的性价比,是日产80-100吨米厂非常实用的谷糙分离设备。


特点

- 采用获得专利的机械结构,自平衡效果好,运转平稳、机械性能稳定可靠。
- 整机结构紧凑,占地面积小,工艺流程安排简单方便(只有三个出口)。
- 采用不锈钢制造的分离筛板,表面光滑,经久耐用不粘糠,适用范围广,分离能力强,可适应长短粒型稻米谷糙的分离。
- 能耗低,噪音小,单位筛理面积大,产量高(与双体重力谷糙分离机单边产量一致)。

MGCZ 60×16J/60×12J paddy separator is the separation equipment newly designed by Yongxiang based on many years of professional experience in R & D and production of paddy separator and analysis on the raw rice at home and abroad as well as the needs of modern rice production technology. With higher cost-effective, it is ideal paddy separating equipment for 80-100 T/day rice milling plant.

Feature

- The application of patented mechanical structure, ensures good self-balancing effect, smooth running, stable and reliable mechanical properties.
- Compact construction, small required area, simple processing flow (only three outlets).
- Separating plate made of stainless steel has smooth surface, durable and no bran stuck to, applicability wide, separating effect good, suitable for long and short brown rice to be separated.
- Low power consumption, low noise, big unit sitting area and big capacity.

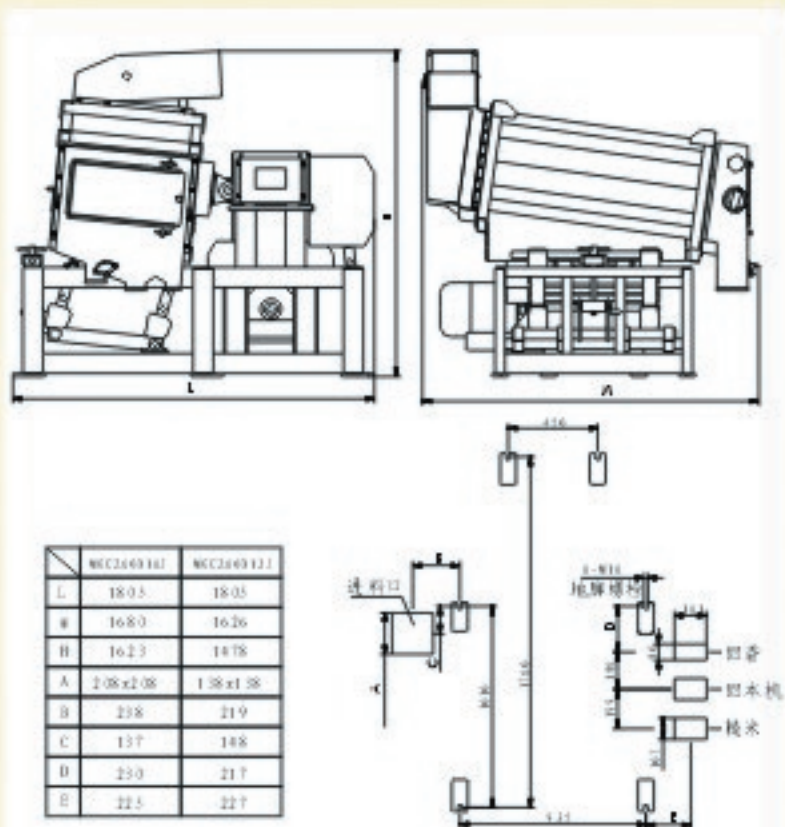

(外形尺寸与地脚安装图)

	MGCZ6016J	MGCZ6012J
L	1805	1805
W	1680	1626
H	1623	1478
A	238x238	138x138
B	238	219
C	137	148
D	230	217
E	225	227

主要技术参数

型号 Type	MGCZ60X16J	MGCZ60X12J
净糙输出量Output(t/h)	2.5-3.5	1.5-2.5
动力配备Power(kw)	2.2	2.2
主轴转速Rotary speed(rpm)	295-305	295-305
机重Weight(kg)	930	870

通过ISO9001国际标准质量体系认证 ISO 9001-2000 Certified

E-mail:yongxiangmiji@sohu.com http://www.hbyxlj.com

地址:湖北省安陆市府河大道8号

ADD: 8 FUHE AVE., ANLU CITY, HUBEI, CHINA

电话(TEL): 0712-5254443 5254445 5258762 传真(FAX):0712-5254443 邮编(POSTCODE): 432800